


Product data sheet

Specifications

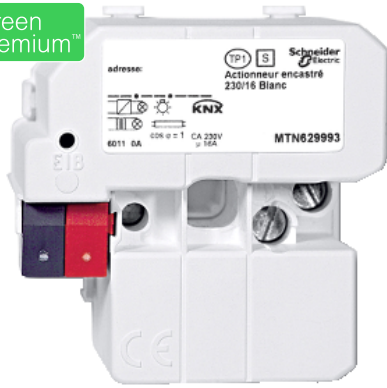

Switch actuator, flush-mounted/230/16, polar white

MTN629993

Main

Range of product	KNX
Product or component type	Switch actuator
Bus type	KNX
Number of contacts	1

Complementary

Device mounting	Flush
[Ue] rated operational voltage	100...240 V
Network frequency	50...60 Hz
[In] rated current	16 A
Load type	Halogen lamps: <= 1700 W, 230 V AC Incandescent lamps: <= 1173 W, 100 V AC Incandescent lamps: <= 2700 W, 230 V AC Incandescent lamps: <= 2817 W, 240 V AC Halogen lamps: <= 739 W, 100 V AC Halogen lamps: <= 1773 W, 240 V AC Parallel compensated fluorescent lamp: <= 434 VA, 100 V AC Parallel compensated fluorescent lamp: <= 1000 VA, 230 V AC Parallel compensated fluorescent lamp: <= 1043 VA, 240 V AC Capacitive: , 10 A, 105 µF, 100...240 V AC

Environment

IP degree of protection	IP20
-------------------------	------

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.2 cm
Package 1 Width	7.4 cm
Package 1 Length	7.4 cm
Package 1 Weight	56.0 g
Unit Type of Package 2	S03
Number of Units in Package 2	100
Package 2 Height	30.0 cm
Package 2 Width	30.0 cm

Package 2 Length	40.0 cm
Package 2 Weight	5.89 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Contractual warranty

Warranty	18 months
----------	-----------

Recommended replacement(s)